

Die vorliegende Leuchte verfügt über ein eingebautes basicDIM Wireless Modul. Für die Inbetriebnahme der beiden Zugtaster dieser Leuchte, ist eine Programmierung in der entsprechenden Smartphone App notwendig (siehe separates Beiblatt).

Gehen Sie in der App wie folgt vor um die beiden Zugtaster korrekt zu programmieren:

**1** Verbinden Sie die Leuchte mit dem Strom und fügen Sie die Leuchte in ein neues oder bestehendes Casambi-Netzwerk hinzu. Hilfe zum Einrichten des Casambi-Netzwerks finden Sie auch auf [support.casambi.com](http://support.casambi.com)

**2** Ist die Leuchte in Ihr neues oder bestehendes Netzwerk hinzugefügt, gelangen Sie per Doppelklick auf die entsprechende Leuchte, in deren Einstellungen.

**3** Scrollen Sie in den Einstellungen nach unten bis zur Option TASTER. Klicken Sie auf den obersten der 4 angezeigten Taster.

**4** Klicken Sie auf „Steuert eine Leuchte“ und ändern Sie die Einstellung auf „Steuert ein Element“.

**5** Klicken Sie auf „Element“ um ein neues Tasterelement auszuwählen. Es erscheint eine Auswahlübersicht an verfügbaren Tastern. Wählen Sie auch hier den Oberen aus und klicken Sie nun 2x oben rechts auf „Fertig“.

**6** Sie gelangen zurück in die Einstellungen der Leuchte. Wiederholen Sie nun nochmals die Schritte 3-5, wählen jedoch jeweils den zweiten Taster in der Auswahl aus und klicken anschließend wieder 2x auf „Fertig“.


**7** In den Einstellungen sind die beiden oberen Taster nun als „Dimmer“ belegt. Klicken Sie nun oben links auf „Zurück“ und anschliessend oben rechts auf „Fertig“ um die Einstellungen zu verlassen.

**8** Bitte prüfen Sie die Zugtaster nun auf ihre korrekte Funktion. Der lange Zugtaster dimmt das Direktlicht, der kurze Zugtaster das Indirektlicht. Sollten die Zugtaster verkehrt funktionieren, wiederholen Sie in den Einstellungen den Schritt 5 und wählen jeweils das andere Element aus.


This luminaire is equipped with a basicDIM Wireless module. For controlling the 2 pull switches of this luminaire, you need to make the following setups within the corresponding smartphone App (see separate leaflet).

Proceed as follows in the smartphone App to programme the 2 pull switches correctly:


**1** Connect the luminaire to a power source and add the luminaire to a new or existing Casambi network. Additional help on setting up the Casambi network can be found under [support.casambi.com](http://support.casambi.com)

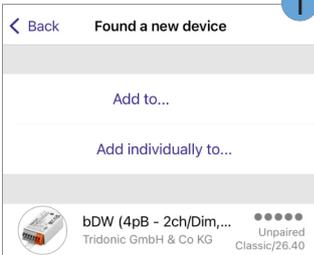


**2** Once the luminaire has been added to a new or existing network, double-click on the corresponding luminaire to access the settings.

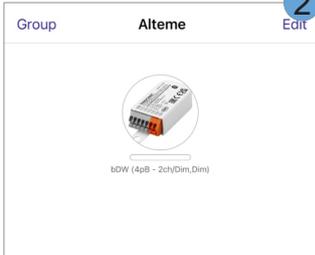


**3** Scroll down in the settings to the PUSH BUTTONS option. Click on the uppermost of the 4 buttons displayed.

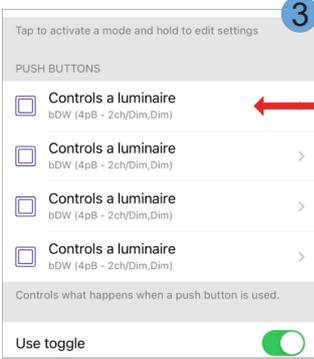


**4** Click on „Controls a luminaire“ and change the setting to „Controls an element“.

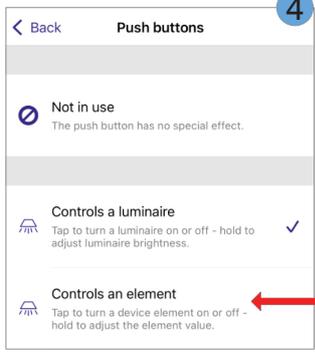


**5** Click on „Element“ to select a new push-button element. A selection overview of available buttons opens up. Select here the upper one as well and click twice on „Done“ at the top right.

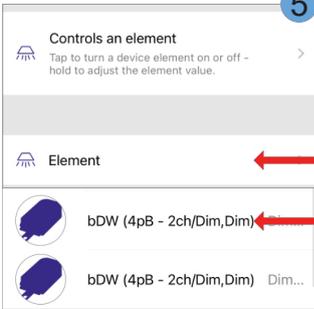

**6** You return to the settings of the luminaire. Now repeat steps 3-5, but select the second button in each selection. Then click twice on „Done“ at the top right.

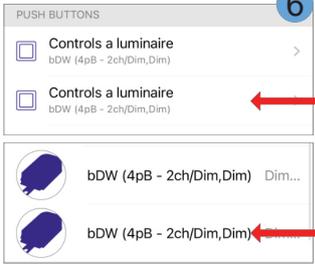

**7** In the settings the two upper buttons are now assigned as „Dimmer“. Now click on „Back“ at the top left and then on „Done“ at the top right to exit the settings.

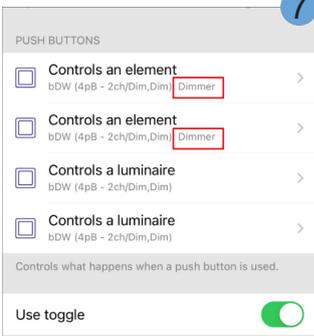

**8** Please make sure that the pull switches are working correctly. The long pull switch dims the direct light, the short switch dims the indirect light. If the pull switch works inverted, repeat step 5 in the settings and select the other element in each case.

